





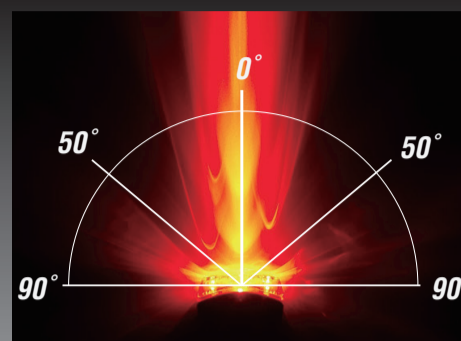





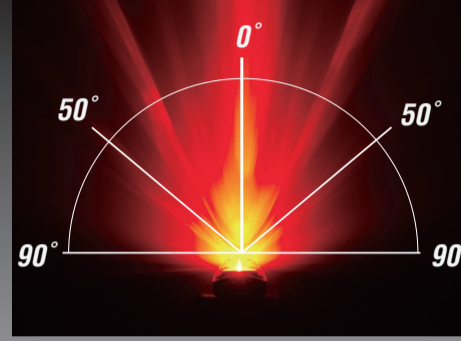





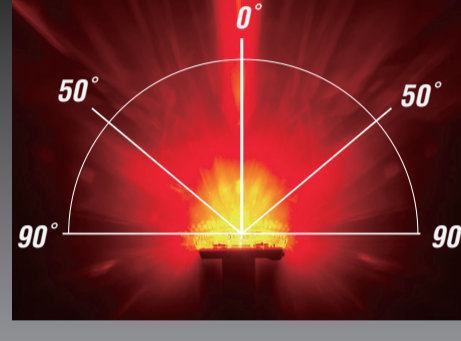





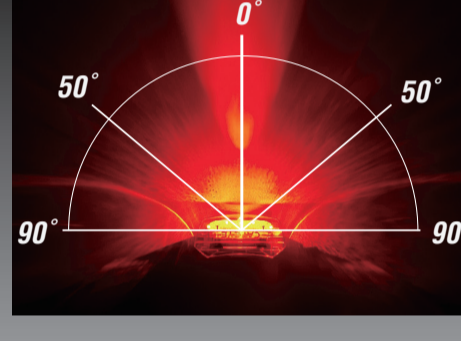





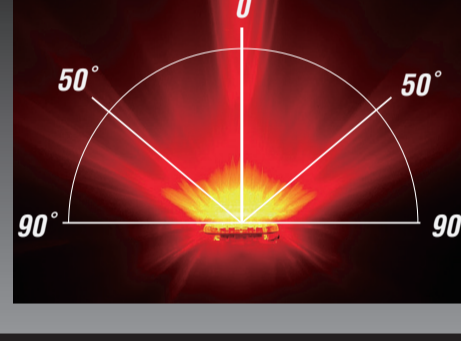





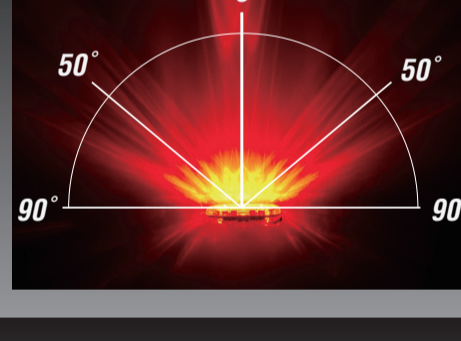





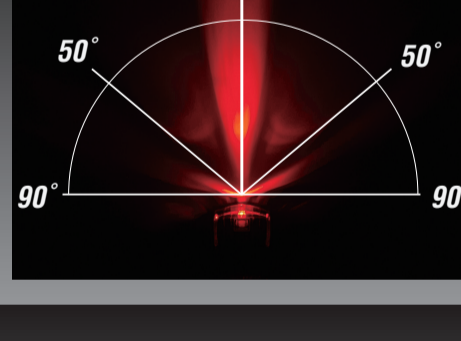





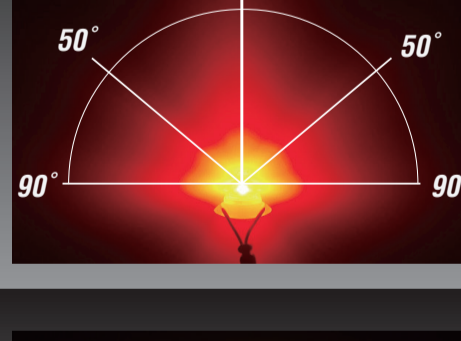




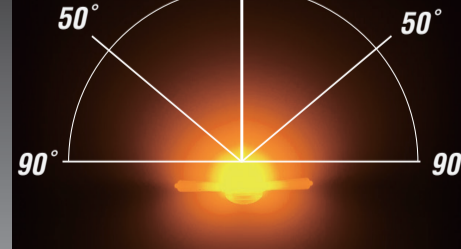






CATEYE SAFETY LIGHTS

FALL 2012 

TOP View	0° View	50° View	90° View			
				RAPID 5 WIDE & SPOT BEAM 		LR03(AAA)×2 RAPID: App. 50hr PULSE: App. 50hr FLASHING: App. 100hr CONSTANT: App. 15hr MOUNT: ø12-32mm *OPTION RM-1BRACKET, CLOTHING CLIP REAR RACK MOUNT
				RAPID 3 SPOT BEAM 	 R: RED LED F: WHITE LED MOUNT: ø22.2-32mm	LR6(AA)×1 -F: RAPID: App. 35hr FLASHING: App. 80hr CONSTANT: App. 6hr MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP -R: RAPID: App. 20hr FLASHING: App. 80hr CONSTANT: App. 3hr MOUNT: ø12-32mm *OPTION RM-1BRACKET REAR RACK MOUNT CLOTHING CLIP
				RAPID 1 USB RECHARGEABLE 	 R: RED LED F: WHITE LED MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP	Li-ion (USB CHARGE: App. 4hr) -F: RAPID: App. 25hr PULSE: App. 25hr FLASHING: App. 40hr CONSTANT: App. 5hr MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP -R: RAPID: App. 10hr FLASHING: App. 15hr CONSTANT: App. 2hr MOUNT: ø21.5-32mm *OPTION RM-1BRACKET, CLOTHING CLIP REAR RACK MOUNT
				REFLEX AUTO / REFLEX AUTO LIGHT (REFLEX AUTO ONLY) REFLECTOR 180°+ VISIBILITY 	 R: RED LED F: WHITE LED MOUNT: ø22.2-31.8mm	LR03(AAA)×2 -F: RAPID: App. 40hr LONG-LIFE: App. 60hr PULSE: App. 40hr FLASHING: App. 60hr CONSTANT: App. 40hr MOUNT: ø22.2-31.8mm -R: RAPID: App. 60hr LONG-LIFE: App. 120hr PULSE: App. 30hr FLASHING: App. 100hr CONSTANT: App. 30hr MOUNT: ø21.5-31.8mm REAR RACK MOUNT
				BLITZ AUTO AUTO LIGHT 180°+ VISIBILITY 	 MOUNT: ø12-32mm REAR RACK MOUNT *OPTION CLOTHING CLIP	LR6(AA)×2 RAPID: App. 200hr FLASHING: App. 400hr CONSTANT: App. 200hr MOUNT: ø12-32mm REAR RACK MOUNT *OPTION CLOTHING CLIP
				OMNI 5 STANDARD 5 LEDs 	 R: RED LED F: WHITE LED MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP	LR03(AAA)×2 -F: RAPID: App. 40hr FLASHING: App. 120hr CONSTANT: App. 40hr MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP -R: RAPID: App. 120hr FLASHING: App. 90hr CONSTANT: App. 60hr MOUNT: ø12-32mm *OPTION CLOTHING CLIP
				OMNI 3 STANDARD 3 LEDs 	 R: RED LED F: WHITE LED MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP	LR03(AAA)×2 -F: RAPID: App. 50hr FLASHING: App. 150hr CONSTANT: App. 50hr MOUNT: ø22.2-32mm *OPTION CLOTHING CLIP -R: RAPID: App. 200hr FLASHING: App. 150hr CONSTANT: App. 100hr MOUNT: ø12-32mm *OPTION CLOTHING CLIP
				SOLAR AUTO LIGHT SOLAR RECHARGEABLE 	 R: RED LED W: WHITE LED MOUNT: -F ø22.2-32mm -R ø12-32mm *OPTION CLOTHING CLIP -R: REAR RACK MOUNT	CAPACITOR FLASHING: App. 5hr MOUNT: -F ø22.2-32mm -R ø12-32mm *OPTION CLOTHING CLIP -R: REAR RACK MOUNT
				LOOP 360° VISIBILITY 	 R: RED LED W: WHITE LED MOUNT: ø22-35mm	CR2032×2 FLASHING: App. 50hr CONSTANT: App. 30hr MOUNT: ø22-35mm
				ORBIT 360° VISIBILITY 	 Amber LED MOUNT: Wheels Wheel Size: 16 - 27 inch Spoke Type: No.13G - No.16G Spoke Count: 32 or 36	CR2032×2 FLASHING: App. 50hr CONSTANT: App. 30hr MOUNT: Wheels Wheel Size: 16 - 27 inch Spoke Type: No.13G - No.16G Spoke Count: 32 or 36



AUTO LIGHT
 Auto on/off controlled by motion and light optic sensors to automatically turn light on when darkness and motion are detected.



OPTICUBE™ TECHNOLOGY
 Our proprietary OptiCube™ lens technology maximizes brightness for greater visibility.



FLEXTIGHT™ BRACKET
 The innovative and versatile FlexTight™ bracket by CatEye can be quickly and securely fastened to virtually any handlebar or stem. Fully re-usable, the FlexTight™ bracket mounts easily without tools and can be finely adjusted and tightened by hand enabling numerous possible computer placement configurations.



RECHARGEABLE TECHNOLOGY
 Solar Cells recharge the battery under direct sunlight. USB rechargeable products recharge the batteries from any USB port.



REFLECTOR TECHNOLOGY
 Our reflector technology exceeds highest government standards for reflective capabilities in USA(CPSC), Great Britain(BS), Europe(ECE) and Japan(JIS).

Web site <http://www.cateye.com/>